

D VHM-Schaftfräser mit Eckenradius Speedcut-Aluminium, lang, freigestellt, Dreischneider, ungleiche Drallsteigung

Einsatzbereich:
VHM-Hochleistungsfräser besonders geeignet zur Bearbeitung von Aluminium-Werkstoffen (sowohl für Guss- als auch Knetlegierungen). Kernanstieg für höchste Stabilität, bester Spanabfluss durch optimiertes Fertigungs-Schleifverfahren, dadurch extrem glatte Oberfläche. Höchstes Zerspanvolumen und beste Oberflächengüte durch einzigartige Schneidengeometrie.


E Solid carbide corner radius end mill Speedcut-Aluminium, long series, neck, three flutes, different spiral angles

Range of application:
Solid carbide high performance end mill especially suitable for aluminium. Center web for highest stability, excellent chip breakage and chip transportation due to optimized manufacturing-grinding method, that is why extremely smooth surface. Highest cutting volume and superior surface quality due to unique cutting edge geometry.

I Frese frontali MDI con spigolo raggiato Speedcut-Alluminio, serie lunga, libero, 3 taglienti, angolo elica disuguale

Impiego:
Fresa frontale MDI ad alto rendimento particolarmente adatta per alluminio. Nocciolo crescente per una maggiore stabilità, eccellente rottura ed evacuazione del truciolo grazie al processo di rettifica ottimizzato che rende la superficie dell'utensile estremamente liscia. Volumi asportati elevati ed eccellente qualità della superficie ottenuta grazie alla unicità della geometria dei taglienti.

Speedcut

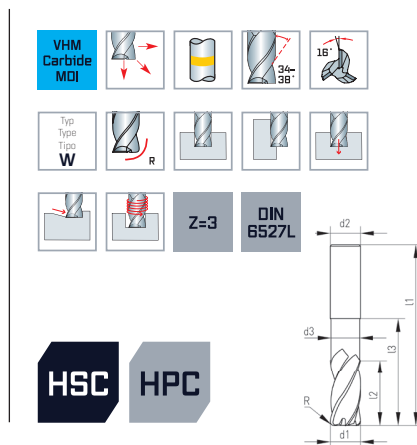

d1 _{h10} mm	R	d2 _{h6} mm	d3 mm	l1 mm	l2 mm	l3 mm	Z	Code 7230 Art.-Nr.
3	0,5	6	2,9	57	8	14	3	0 7230003051 00
4	0,5	6	3,6	57	11	16	3	0 7230004051 00
5	0,5	6	4,6	57	13	18	3	0 7230005051 00
	1	6	4,6	57	13	18	3	0 7230005101 00
6	0,5	6	5,5	57	13	21	3	0 7230006051 00
	1	6	5,5	57	13	21	3	0 7230006101 00
8	0,5	8	7,5	63	19	27	3	0 7230008051 00
	1	8	7,5	63	19	27	3	0 7230008101 00
	2	8	7,5	63	19	27	3	0 7230008201 00
10	0,5	10	9,5	72	22	32	3	0 7230010051 00
	1	10	9,5	72	22	32	3	0 7230010101 00
	2	10	9,5	72	22	32	3	0 7230010201 00
12	1	12	11,5	83	26	38	3	0 7230012101 00
	2	12	11,5	83	26	38	3	0 7230012201 00
16	3	12	11,5	83	26	38	3	0 7230012301 00
	1	16	15,0	92	32	44	3	0 7230016101 00
	2	16	15,0	92	32	44	3	0 7230016201 00

Optional ohne Aufpreis auch mit Weldon-Schaft (DIN 6535-HB) lieferbar. | Also available with Weldon-shank (DIN 6535-HB) without extra charge. | Anche disponibili con attacco Weldon (DIN 6535-HB) senza prezzo aggiuntivo.

